


# SCOCXOL HCMOS Output

## Ultra Fast Warm-up OCXO – up to 54 MHz



### DIMENSIONS

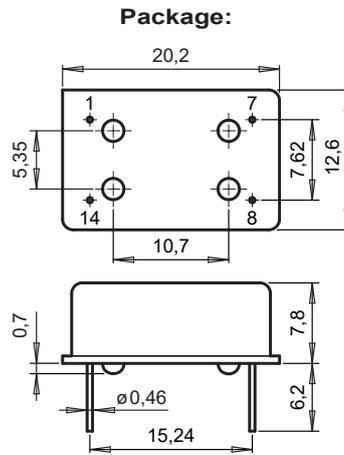

### APPLICATIONS

Instrumentation  
Digital Switching  
Radio Transceiver  
Airborne Equipment  
Telecom Transmission  
Battery Operated Systems  
Sonet / SDH / DWDM / FDM/36 / WIMAX

### DESCRIPTION

The SCOCXOL is an Oven Controlled Quartz Crystal Oscillator with HCMOS Output that incorporates a custom circuit and an XTAL operating under vacuum, in a hermetically sealed DIL-14 metal package.

### FEATURES

High stability and low aging.  
Ultra fast warm-up.  
Ultra low power consumption.  
Operates in fundamental mode.  
High shock and vibration resistant.  
RoHS-compliant.

### ELECTRICAL CHARACTERISTICS AT 25°C

Frequency versus temperature	$\Delta F/F$	see table 1 (without air flow)		
A: 0 to +60°C B: -20 to +70°C C: -40 to +85°C E: -55 to +85°C				
Frequency long term aging	$\Delta F/F$	< 40 MHz	≥ 40 MHz	ppm
long term aging 10 years		< ±2.5	< ±4	
long term aging 1 <sup>st</sup> year	<sup>1)</sup>	≤ ±0.3	≤ ±0.7	
Minimum frequency control range by $V_C$ or $R_C$	$\Delta F/F$	< 40 MHz	≥ 40 MHz	ppm
see table 3		≥ ±2.5	≥ ±4	
Supply voltage	$V_{DD}$	3.3 / 5.0		V
Input current	$I_{DD}$	see table 2		mA
Output signal		HCMOS compatible		
$F_{OUT}$ duty cycle @ $V_{DD}/2$ (min./max.)	$\delta_{FOUT}$	40 / 60		%
Rise & fall time (load = 15 pF)	$t_r / t_f$	≤ 7		ns
Output level $V_{OL} / V_{OH}$		< 0.4 / > $V_{DD} - 0.5$		V
Start-up time	$t_{START}$	< 5		ms
Capacitive load min. / max.	$C_L$	3 / 47		pF
Frequency stability versus load change of ±10%	$\Delta F/F$	< 40 MHz	≥ 40 MHz	ppb
		≤ ±10	≤ ±30	
Warm-up time within ±0.1 ppm at +25°C	$V_{DD}$	3.3	5.0	V
	t	≤ 30	≤ 20	s
Stability versus $V_{DD}$	$\Delta F/F$	< ±0.1		ppm

1) After 30 days operating

**ELECTRICAL CHARACTERISTICS  
AT 25°C (continuation)**

Short term stability (Allan deviation) at T = 0.1 to 30 s 0.05 ppb typical at T = 1 s	$\sigma$	< 0.1	ppb
Phase noise typical at 10 MHz: Static conditions, 10 Hz BW = 1 Hz 100 Hz 1 kHz 10 kHz 100 kHz	L	-100 -130 -140 -145 -145	dBc/ Hz

**TABLE 1:  $\Delta F/F$ ,  $V_{DD} = 3.3 V$**

Operating Temperature range	$V_{DD} = 3.3 V \pm 0.15 V$	
	Standard (blank)	High stability version (T)
A = 0 to +60°C	$\leq \pm 75$ ppb	$\leq \pm 50$ ppb
B = -20 to +70°C	$\leq \pm 150$ ppb	$\leq \pm 75$ ppb
C = -40 to +85°C	$\leq \pm 250$ ppb	$\leq \pm 100$ ppb
E = -55 to +85°C	$\leq \pm 400$ ppb	$\leq \pm 200$ ppb

**TABLE 1:  $\Delta F/F$ ,  $V_{DD} = 5.0 V$**

Operating Temperature range	$V_{DD} = 5.0 V \pm 0.2 V$	
	Standard (blank)	High stability version (T)
A = 0 to +60°C	$\leq \pm 50$ ppb	$\leq \pm 25$ ppb
B = -20 to +70°C	$\leq \pm 100$ ppb	$\leq \pm 50$ ppb
C = -40 to +85°C	$\leq \pm 150$ ppb	$\leq \pm 100$ ppb
E = -55 to +85°C	$\leq \pm 400$ ppb	$\leq \pm 200$ ppb

**TABLE 2:  $I_{DD}$  (load typ.  $C_L = 15$  pF)**

Temperature	$V_{DD} = 3.3 V$	$V_{DD} = 5.0 V$
+25°C	$\leq 80$ mA	$\leq 50$ mA
-20°C	$\leq 120$ mA	$\leq 80$ mA
Start-up current at +25°C / duration	$\leq 350$ mA / 10 s	$\leq 300$ mA / 10 s

**TABLE 3: Input pin 1  $V_C$**

Frequency adjustment control	$V_{DD} = 3.3 V$	$V_{DD} = 5.0 V$
Control voltage range $V_C$ (V3 or V5) (input impedance $Z_{VC} > 47$ k $\Omega$ )	0 to 3.3 V	0.5 to 5.0 V
Control resistor range (R1) $R_C$ between pin $V_C$ and GND (input impedance $Z_{VC} > 4.7$ k $\Omega$ )	0 to 10 k $\Omega$	0 to 10 k $\Omega$
Slope polarity	Positive	
No frequency control (YA or YB)	Pin $V_C$ has to be connected to GND	

## STANDARD FREQUENCIES

Frequencies			
10.0000 MHz	12.8000 MHz	14.7456 MHz	16.3840 MHz
20.0000 MHz	25.6000 MHz	26.0000 MHz	32.7680 MHz
40.0000 MHz	52.0000 MHz	54.0000 MHz	
Other frequencies from 10 kHz to 54 MHz on request			

## ENVIRONMENTAL CHARACTERISTICS

	Conditions
Storage temperature range	-55 to +125°C
Shock resistance (survival)	5000 g, 0.3 ms, ½ sine
Vibration resistance (survival)	20 g / 10 – 2000 Hz

## TERMINATIONS AND PROCESSING, OPTION 1

Pins soldering	+235°C / 10 s max. +260°C / 5 s max.
Package	Metal DIL-14 / 4 pins
Terminations (Option 1) (see Application Manual)	SMD, formed leads (D2)
	THD, Standard (Blank)

## ORDERING INFORMATION

SCOCXOL W T - C V3 20.000 MHz D2 XXX			
<p><b>Supply voltage</b></p> <p>W = <math>V_{DD} = 3.3\text{ V}</math></p> <p>V = <math>V_{DD} = 5.0\text{ V}</math></p> <p><b>Frequency stability</b></p> <p>T = High stability</p> <p>Blank = Standard</p> <p><b>Temperature range</b></p> <p>A = 0 to +60°C</p> <p>B = -20 to +70°C</p> <p>C = -40 to +85°C</p> <p>E = -55 to +85°C</p> <p>X = Custom</p> <p><b>Frequency control</b></p> <p>R1 = <math>R_c = 0</math> to 10 kΩ</p> <p>V3 = <math>V_c = 0</math> to 3.3 V</p> <p>V5 = <math>V_c = 0.5</math> to 5.0 V</p> <p>YA = Internal accuracy <math>\leq \pm 1.0</math> ppm</p> <p>YB = Internal accuracy <math>\leq \pm 0.5</math> ppm</p> <p>Y = Custom</p>	<p><b>Frequency</b></p> <p>20.000 MHz</p> <p><b>Option 1</b></p> <p>D2 = SMD (formed leads)</p> <p>Blank = THD (Standard)</p> <p><b>Customer specification N°</b></p> <p>XXX</p>		
<p>A unique part number will be generated for each product specification, i.e:</p> <table border="1"> <tr> <td>20xxxx-EA00</td> <td>yyy pcs (in ESD plastic tray)</td> </tr> </table>		20xxxx-EA00	yyy pcs (in ESD plastic tray)
20xxxx-EA00	yyy pcs (in ESD plastic tray)		

All specifications subject to change without notice.



A COMPANY OF THE SWATCH GROUP

Micro Crystal AG  
Muehlestrasse 14  
CH-2540 Grenchen  
Switzerland

Phone +41 32 655 82 82  
sales@microcrystal.com  
www.microcrystal.com